
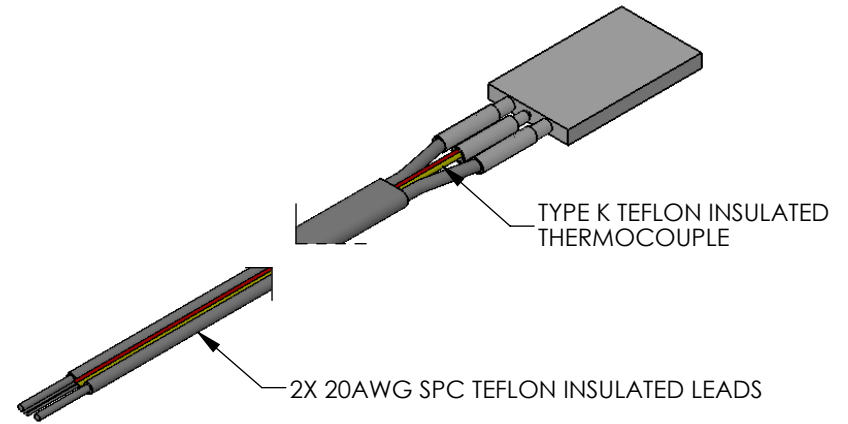
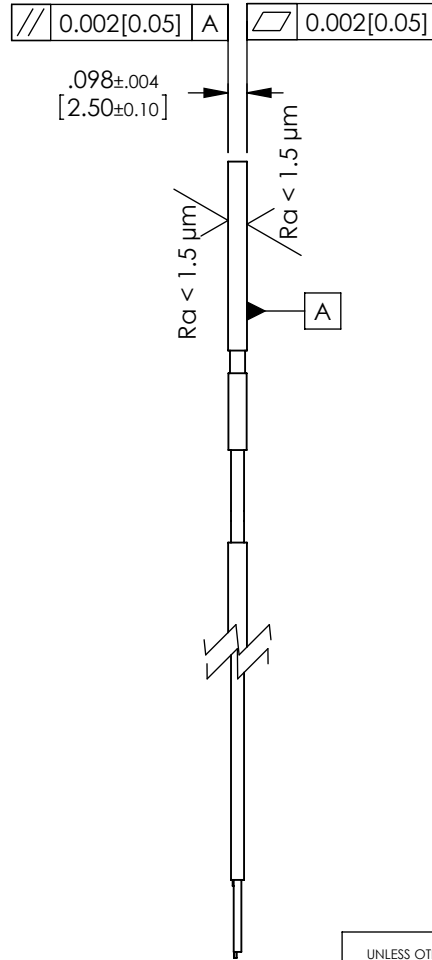


REVISION HISTORY				
REV.	ECO#	DESCRIPTION	DATE	BY
		ORIGINAL RELEASE	5/21/2007	YW
1		162=>80 OHMS	6/6/2007	YW
2		REDRAWN NEW FORMAT	11/14/2008	KAH

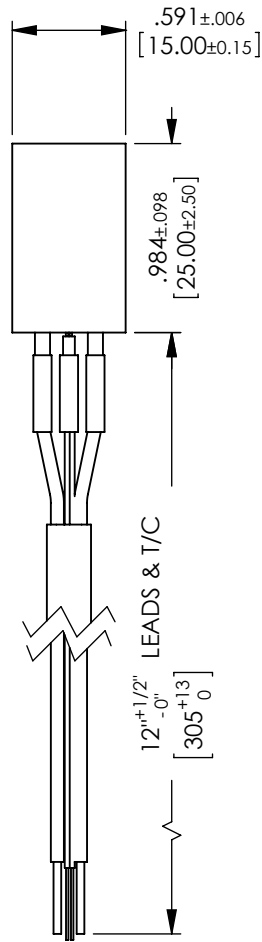

NOTES:

1. VOLTAGE: 120 VOLTS
2. POWER: 180 WATTS (NOMINAL) AT 25°C.
3. RESISTANCE: 80.00 ± 20.00 OHMS AT 25°C.
4. TCR: .00150 ± .00025 /°C.
5. MAXIMUM TEMPERATURE: 400°C.

B

B

A

A

FINISH	
MATERIAL	AIN
CUSTOMER	WATLOW SALES

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES & [MILLIMETERS] PER ASME Y14.5M-1994. TOLERANCES: FRACTIONS ±1/16" X ±.01" .XX ± 0.01" & [.X] ± 0.3mm .XXX ± 0.005" & [.XX] ± 0.13mm .XXXX ± 0.0005" & [.XXX] ± 0.013mm ANGLES ±0.5°

CONFIDENTIAL: This drawing and all information associated therewith may contain the confidential information of Watlow, or its customers or suppliers, which is subject to patent, trademark, copyright, or trade secret protection. Neither this drawing or the information associated therewith should be reproduced, used, or disclosed to others without the prior written permission of Watlow. Copyright 2004 Watlow Electric Manufacturing Co. All rights reserved.

DWN:	YW	5/21/07
CHK:		
ENG:		
MFG:		
QA:		
PUR:		
<p>THIRD ANGLE PROJECTION</p>		
CAD/REF. NO.	CER-1-01-00098	

909 Horan Drive Fenton, MO 63026 Phone 636-349-5123 Fax 636-349-5352		
TITLE ULTRAMIC 600 ADVANCED CERAMIC HEATER CUSTOMER		
SIZE	DWG. NO.	REV
A	CER-1-01-00098-Customer	2
SCALE	WEIGHT	SHEET
1:1		1 OF 1

FORM: TITLE BLOCK REV. A

FORM: 1 CER-1-01-00098-Customer 2