


REVISION HISTORY				
REV.	ECO#	DESCRIPTION	DATE	BY
.		ORIGINAL RELEASE	08/27/2012	AVS

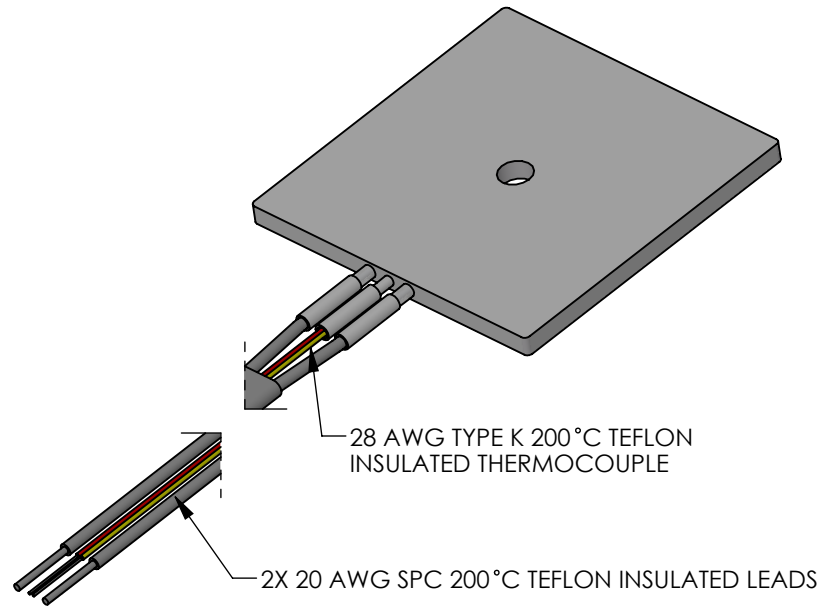

- NOTES:
- VOLTAGE: 240 VOLTS
 - POWER: 1500 WATTS (NOMINAL) AT 25°C.
 - RESISTANCE: 38.4 ± 9.6 OHMS AT 25°C.
 - TCR: $.00150 \pm .00025 / ^\circ C$.
 - MAXIMUM TEMPERATURE: 400°C.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES & [MILLIMETERS] PER ASME Y14.5M-1994. TOLERANCES: FRACTIONS ±1/16" X ±0.1" .XX ± 0.01" & [X] ± 0.3mm .XXX ± 0.005" & [XX] ± 0.13mm .XXXX ± 0.0005" & [XXX] ± 0.013mm ANGLES ±0.5°	DWN:	AVS	08/27/2012		12001 Lackland Road St. Louis, MO 63146 PHONE 314-878-4600 FAX 314-878-6814		
	CHK:						
CONFIDENTIAL: This drawing and all information associated therewith may contain the confidential information of Watlow, or its customers or suppliers, which is subject to patent, trademark, copyright, or trade secret protection. Neither this drawing or the information associated therewith should be reproduced, used, or disclosed to others without the prior written permission of Watlow. Copyright 2004 Watlow Electric Manufacturing Co. All rights reserved.	ENG:			WATLOW TITLE ULTRAMIC 600 ADVANCED CERAMIC HEATER CUSTOMER			
	MFG:						
	QA:						
FINISH	PUR:			SIZE	DWG. NO.	REV.	
	MATERIAL			A	CER-1-01-00542-CUSTOMER	.	
CUSTOMER				CAD/REF. NO.	SCALE	WEIGHT	SHEET
Watlow sales				CER-1-01-00542	1:1		1 OF 1

B
A

FORM: TITLE BLOCK REV. A