
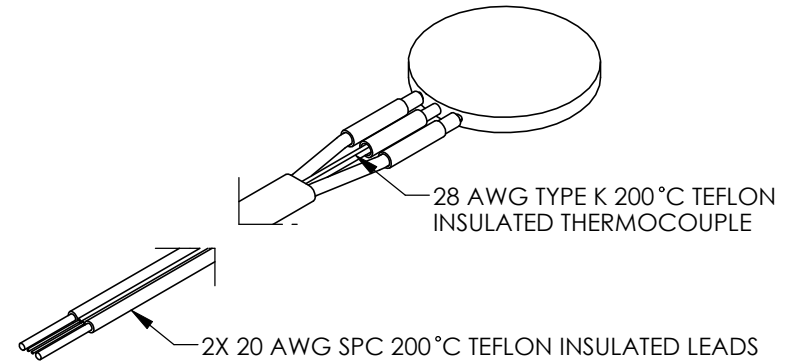


2

1

REVISION HISTORY				
REV.	ECO#	DESCRIPTION	DATE	BY
1		ORIGINAL RELEASE	9-3-09	BEN

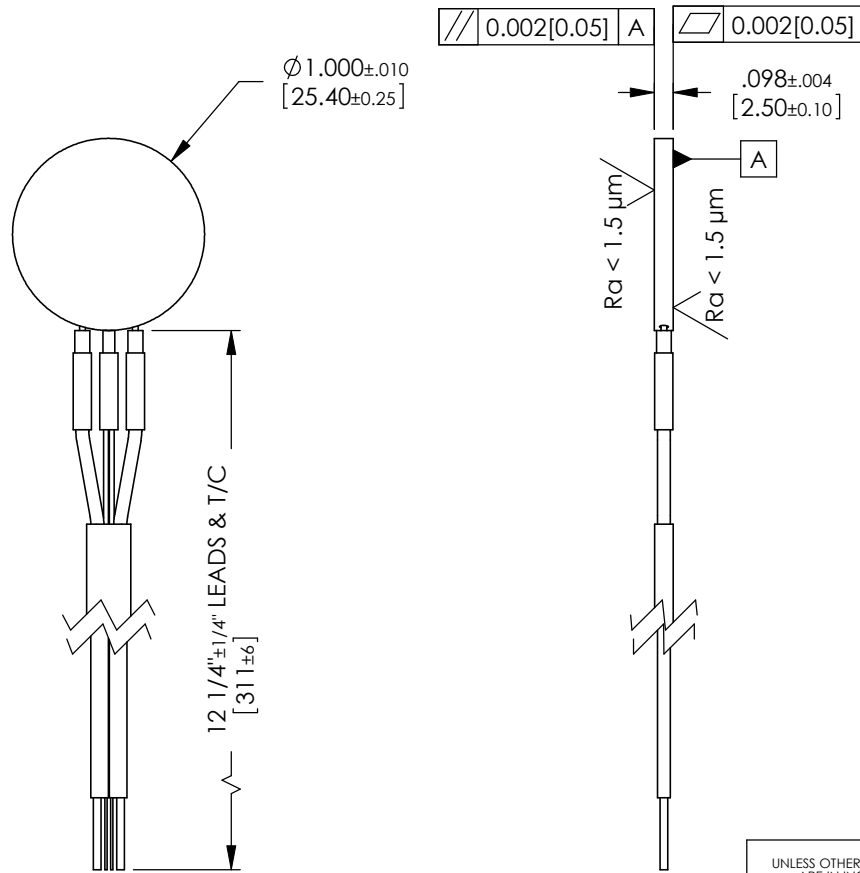

NOTES:

1. VOLTAGE: 120 VOLTS
2. POWER: 300 WATTS (NOMINAL) AT 25°C.
3. RESISTANCE: 48.00 ± 12.00 OHMS AT 25°C.
4. TCR: .00150 ± .00025 /°C.
5. MAXIMUM TEMPERATURE: 400°C.

B

B

A

A

FINISH	
MATERIAL	AIN
CUSTOMER	WATLOW SALES

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES & [MILLIMETERS] PER ASME Y14.5M-1994. TOLERANCES: FRACTIONS ±1/16" X ±.01" .XX ± 0.01" & [.X] ± 0.3mm .XXX ± 0.005" & [.XX] ± 0.13mm .XXXX ± 0.0005" & [.XXX] ± 0.013mm ANGLES ±0.5°	DWN:	KAH	9-3-09
	CHK:		
	ENG:		
	MFG:		
CONFIDENTIAL: This drawing and all information associated therewith may contain the confidential information of Watlow, or its customers or suppliers, which is subject to patent, trademark, copyright, or trade secret protection. Neither this drawing or the information associated therewith should be reproduced, used, or disclosed to others without the prior written permission of Watlow. Copyright 2004 Watlow Electric Manufacturing Co. All rights reserved.	QA:		
	PUR:		
	<p>THIRD ANGLE PROJECTION</p>		
CAD/REF. NO.	CER-1-02-00074		

		12001 Lackland Road St. Louis, MO 63146 PHONE 314-878-4600 FAX 314-878-6814	
		<p>ULTRAMIC 600 ADVANCED CERAMIC HEATER CUSTOMER</p>	
SIZE	DWG. NO.	REV	
A	CER-1-02-00074-Customer	1	
SCALE	WEIGHT	SHEET	
1:1		1 OF 1	

2

FORM: TITLE BLOCK REV. A